

QF Viewing Spool 3205

Size In.	Rolled Edge (nom. in.)	Length In.	Std Weight Lbs	Galvanized Steel			304SS (or 316SS)						
				22ga	20ga	18ga	22ga	20ga					
3	0.2	12.5	2.50	Std		Optional	Std						
4	0.2		3.00										
5	0.2		3.50										
6	0.2		4.10										
7	0.3		4.60										
8	0.3		5.00										
9	0.3		5.45										
10	0.3		6.25										
11	0.3		7.10										
12	0.4		8.20										
13	0.4		11.25							Std		Std	
14	0.4		14.10										
15	0.4		18.25										
16	0.4		22.60										
17	0.4												
18	0.4		18.00										

Construction:

Seam: longitudinal seam is lapped, spot welded and caulked.


Collars: have a laser welded longitudinal seam (exception: 3" collars are lapped, spot welded, and caulked.)

Collars are attached to the body using a raised hemmed, spot welded seamed construction and are caulked.

Threaded rod: size is 3/8" h.



Note: Standard QF end can be changed to Raw ID (RAWID), Raw OD (RAWOD), No Fitting (NF), Hose Adapter (RAW-FLEX), Flat Flange (FFL), Angle Flange (ANGFL), or Van Stone (VANSTONE).

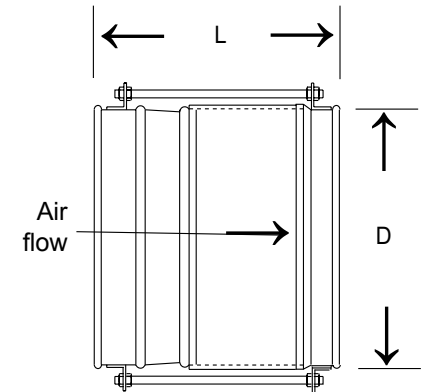

Temperature Rating of Product Components	
° F	QF Viewing Spool
225°	Acrylic

Additional Notes	
Max. temperature limited due to properties of the acrylic viewing port	

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
QF Viewing Spool body	Galvanized	ASTM A527 with a G-90 rating
	304SS	Finish meets ASTM A240
	316SS	Finish meets ASTM A240
QF Viewing Spool viewing port	Acrylite® - clear, .250 thick	ASTM D5436 Material Properties ASTM D648 Thermal Properties
3M Scotch Seal Metal Sealant 2084	Acetone blend	AAMA Specification 801.1