

QF Press Formed Elbows, Long Radius, 3" - 7"

3210 LR

TECHNICAL DATA

Size In.	Bend Degrees Available	CLR (Center Line Radius)	Tangents		Std Weight 30° Lbs	Std Weight 45° Lbs	Std Weight 60° Lbs	Std Weight 90° Lbs	Galvanized Steel	304SS (or 316SS)	
			Galvanized	SS					24ga	14ga	22ga
3	15°	1.5	2.00	2.00	0.80	0.90	0.65	0.90	Std	Tubed	
4	30°		1.32	2.00	0.96	1.05	0.80	1.00			
5	45°		1.32	2.00	1.40	1.60	1.15	1.20			
6	60°		1.32	2.00	1.80	2.20	1.35	1.50			
7	90°		1.32	2.25	2.60	2.90	1.65	2.20			Std

Construction:

Standard galvanized steel LR 3" to 7" elbows are press formed. Press formed halves are stitch welded together with rolled ends. Stainless steel 3" to 6" elbows are tubed.

Ends: Standard QF end can be changed to Raw ID (RAWID), Raw OD (RAWOD), No Fitting (NF), Hose Adapter (RAWFLEX), Flat Flange (FFL), Angle Flange (ANGFL), or Van Stone (VANSTONE).

Collars: If End type other than QF is needed or if Epoxy caulking is needed, a collar is located on the exterior side of each port and considered as air flow non-directional. Collars have a laser welded longitudinal seam (exception: 3" collars are lapped, spot welded, and caulked.) If air flow directional product is required, it must be stated on the PO and additional cost may be incurred. A raised lap seam and spot weld are used for attaching the collar to the body and no caulking is used. If caulking is required, additional cost is incurred.


Notes:

Size 8" to 24" elbows are gored.

Height of 90° elbows can be calculated:

(Elbow diameter X CLR) + length of one tangent + 1/2 diameter

Example: (4" X 1.5) + 1.32 + 2 = 9.32

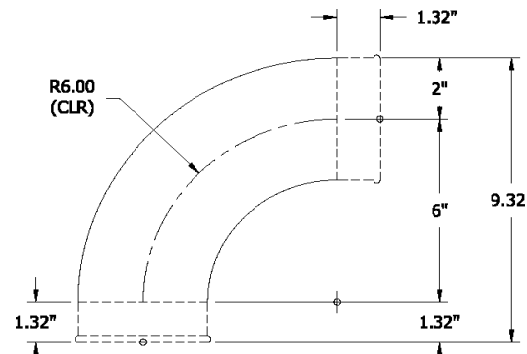

Example shown: 4" 90° Elbow 1.5 CLR=6"



QF Press Formed Elbows, Long Radius, 3" - 7" 3210 LR

**TECHNICAL
DATA**

Temperature Rating of Product Components						
° F	QF Press Formed Elbows		Sealants			
-60°	Galvanized Steel	Optional - 304SS		Optional - 3M Polyurethane Adhesive Sealant 540	Optional - Rock River Silicone Sealant	Optional - Epoxy - 3M DP 125 Gray Sealant
-40°			3M Scotch Seal Metal Sealant 2084			
0°						
194°						
250°						
390°						
500°						
1100°						

Additional Notes
At temperatures ranging between 390° F and 480° F, the zinc-iron alloy layers in galvanized steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 390° F.
Rock River Silicone Sealant and Red Devil HVAC/R High Temperature Silicone Sealant are not paintable.
304SS: • bluing may occur at 800° F and above

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
QF Press Formed Elbows	Galvanized	ASTM A527 with a G-90 rating
	304SS	Finish meets ASTM A240
	316SS	Finish meets ASTM A240
3M Scotch Seal Metal Sealant 2084	Acetone blend	AAMA Specification 801.1
3M Polyurethane Sealant 540	Polyurethane	ASTM E 162, ASTM E 662, Bombardier SP 800-C
Rock River Sealant	100% Silicone	ASTM C920 Class 25, TT-S-00230C Class A and TT-S-001543A, FDA No 421 CFR 117.2600, conforms to FDA requirements
Red Devil HVAC/R High Temperature Sealant	Silicone	ASTM C920 Class 25, TT-S-00230C Class A and TT-S-001543A, CEBTP 432.6 140-2, Mil Spec 46106A, CGSB 19C9-9B, DIN 18540 Part 2, OREX 150031-2