



Size (ID) In.	Std Weight Lbs	304SS	
		20ga	20ga
3	0.45	Std	Optional
4	0.62		
5	0.84		
6	1.12		
7	1.35		
8	1.63		
9	1.94		
10	2.26		
11	2.47		
12	2.97		
13	3.30		
14	4.41		
15	5.10		
16	5.60		
17	6.10		
18	6.74		
19	7.25		
20	7.68		
21	8.13		
22	8.94		
23	9.20		
24	11.25		

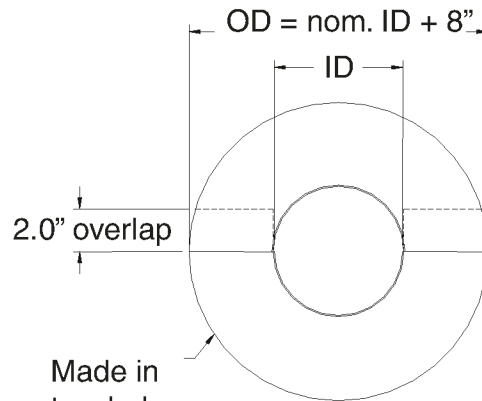


Made in two halves.
A quantity of one purchased flashing equals four halves, two halves for inside and two halves for outside.

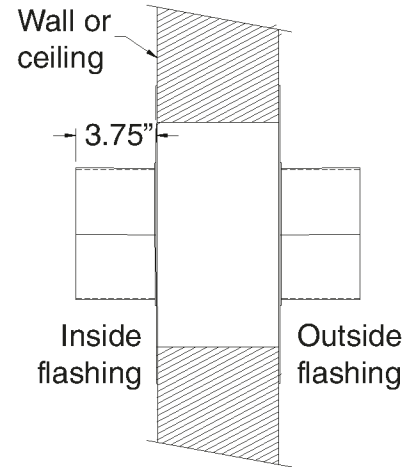

Notes:

Ordering one Wall Flashing provides you with both an inside and an outside flashing, total four halves.

Flashing can be ordered with Raw collar with or without lip.

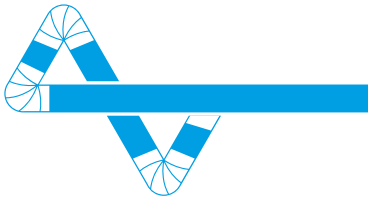

Wall Flashing 3238

**TECHNICAL
DATA**

Temperature Rating of Product Components						
° F	QF Wall Flashing		Sealants			
-60°	Galvanized Steel	Optional - 304SS	3M Scotch Seal Metal Sealant 2084	Optional - 3M Polyurethane Adhesive Sealant 540	Optional - Rock River Silicone Sealant	Optional - Red Devil HVAC/R High Temperature Silicone Sealant
-40°				Optional - Epoxy - 3M DP 125 Gray Sealant		
0°						
194°						
250°						
400°						
500°						
1100°						

Additional Notes
Optional - Seams can be solid welded
Rock River Silicone Sealant and Red Devil HVAC/R High Temperature Silicone Sealant are not paintable
Galvanized steel provides little or no breakdown of zinc (zinc melting point 740°F)
304SS: • bluing may occur at 800° F and above

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
QF Wall Flashing	Galvanized	ASTM A527 with a G-90 rating
	304SS	Finish meets ASTM A240
	316SS	Finish meets ASTM A240
3M Scotch Seal Metal Sealant 2084	Acetone blend	AAMA Specification 801.1
3M Polyurethane Sealant 540	Polyurethane	ASTM E 162, ASTM E 662, Bombardier SP 800-C
Rock River Sealant	100% Silicone	ASTM C920 Class 25, TT-S-00230C Class A and TT-S-001543A, FDA No 421 CFR 117.2600, conforms to FDA requirements
Red Devil HVAC/R High Temperature Sealant	Silicone	ASTM C920 Class 25, TT-S-00230C Class A and TT-S-001543A, CEBTP 432.6 140-2, Mil Spec 46106A, CGSB 19C9-9B, DIN 18540 Part 2, OREX 150031-2