


# Rigid Metal Flex Hose 3281

Size In.	ID In.	Approx. Outside Dia * In.	Min. CLR Bend Radius	Approx. Weight Per Foot Lbs	Weight Lbs
1.5	1.125	1.750	6.375	1.00	1.00
2	2.000	2.250	9.000	1.30	1.30
2.5	2.3125	2.750	10.250	1.60	1.60
3	3.0625	3.250	12.500	2.00	2.00
3.5	3.500	3.750	14.250	2.30	2.30
4	4.000	4.250	16.250	2.60	2.60
5	5.000	5.250	19.500	3.00	3.00
6	6.000	6.250	25.000	3.60	3.60
7	7.250	7.250	27.500	4.20	4.00
8	8.125	8.250	32.000	4.70	4.60
9	9.125	9.250	34.000	5.30	5.30
10	9.750	10.250	37.500	5.90	5.90
12	12.000	12.250	44.000	7.00	7.00

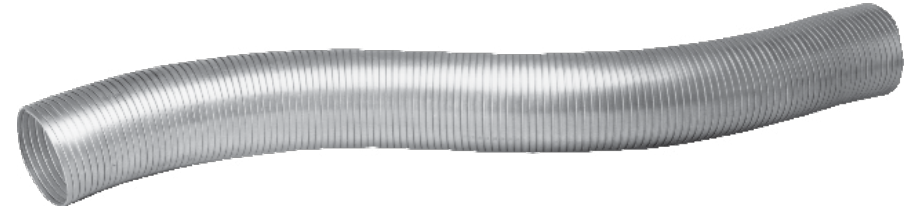

\*OD varies depending on how hose is wound

- Flexible rigid steel hose, galvanized or stainless, for higher temperature or abrasive material
- Temperature rating: galvanized steel max. 390° F / Stainless Steel max. 1500° F

**Ends:** Standard raw end can be changed to Raw ID, Raw OD, No fitting, Hose Adapter, Flat Flange, or QF (additional cost for hose assembly).