


Hose Adapter

Ordering Information

- When ordering, specify material, gauge (if non-standard), dimension and end styles. Standard end styles are QF to RAWFLEX.
- Connects to Rubber Hose. Not compatible with metal flex hose.




| Ø in. | Length in. | Std Weight Lbs |
|-------|------------|----------------|
| 3 | 5.5 | 0.60 |
| 4 | 4.0 | 0.75 |
| 5 | 4.0 | 0.95 |
| 6 | 4.0 | 1.10 |
| 7 | 4.0 | 1.35 |
| 8 | 4.0 | 1.50 |
| 9 | 4.0 | 1.75 |
| 10 | 4.0 | 1.95 |
| 11 | 4.0 | 2.10 |
| 12 | 4.0 | 2.30 |
| 13 | 5.5 | 2.45 |
| 14 | 5.5 | 2.70 |
| 15 | 5.5 | 3.05 |
| 16 | 5.5 | 3.20 |
| 17 | 5.5 | 3.32 |
| 18 | 5.5 | 3.45 |
| 19 | 5.5 | 3.68 |
| 20 | 5.5 | 3.90 |
| 21 | 5.5 | 4.10 |
| 22 | 5.5 | 4.30 |
| 23 | 5.5 | 4.95 |
| 24 | 5.5 | 5.60 |

QF Material Options

| Galv | | | | SS | | |
|----------|---------------|--------|--------|---------------|--------|----|
| Gauges | Size (inches) | | Gauges | Size (inches) | | |
| | Min. Ø | Max. Ø | | Min. Ø | Max. Ø | |
| Standard | 22 | 3 | 12 | 22 | 3 | 12 |
| | 20 | 13 | 24 | 20 | 13 | 24 |
| Optional | 18 | 4 | 24 | 18 | 8 | 24 |
| | 16 | 8 | 24 | 16 | 8 | 24 |

Flanged Material Options

| Galv (Std) | | | | SS | | |
|------------|---------------|--------|--------|---------------|--------|----|
| Gauges | Size (inches) | | Gauges | Size (inches) | | |
| | Min. Ø | Max. Ø | | Min. Ø | Max. Ø | |
| Standard | 22 | 3 | 12 | 22 | 3 | 12 |
| | 20 | 13 | 40 | 20 | 13 | 40 |
| Optional | 18 | 4 | 40 | 18 | 8 | 40 |
| | 16 | 8 | 40 | 16 | 8 | 40 |
| | 14 | 8 | 50 | | | |
| | 12 | 10 | 72 | | | |

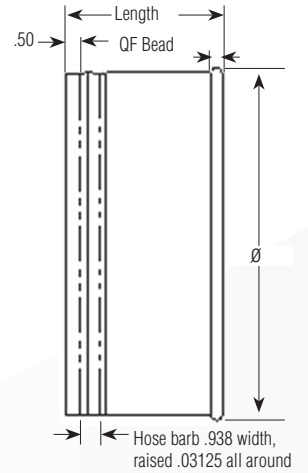

Construction

Seam: Longitudinal seam is solid laser welded.

Optional End Styles

Standard QF end can be changed to Raw ID (RI), Raw OD (RO), No Fitting (NF), Flat Flange (FFL), Angle Flange (AFL), or Van Stone (VS).

*Published lengths are nominal and may vary slightly.